
RAY-BAR SHIELDED SPREADER BAR FOR NEW BOX PENETRATION INSTALLATIONS

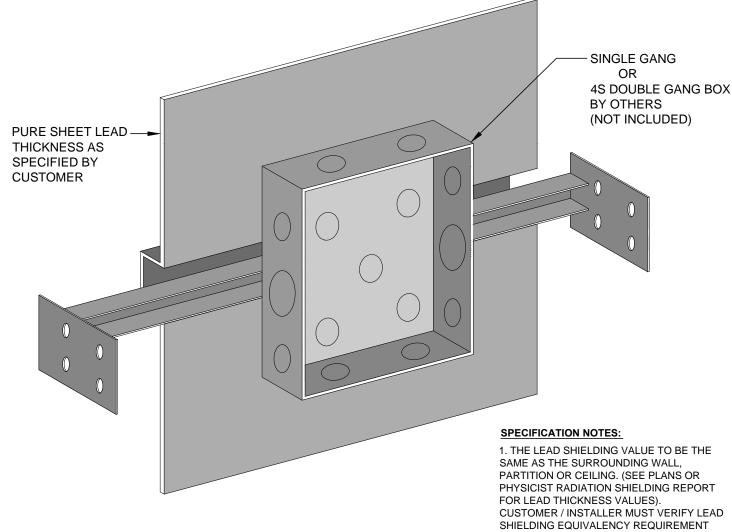

• CUSTOMER IS RESPONSIBLE TO VERIFY THE LEAD SHIELDING THICKNESS REQUIREMENT PRIOR TO ORDERING PRIOR TO ORDERING.

2. ALL RAY-BAR SHEET LEAD IS 99.9% PURE MEETING FEDERAL SPC QQ-L-201F GRADE C AND ASTM B749 TYPE L51121 AND ALL APPLICABLE NCRP REPORTS.

SHIELDED SINGLE GANG OR 4S DOUBLE GANG BOX WITH HANGER SPREADER BAR FOR NEW INSTALLATION APPLICATION CENTERING THE BOX BETWEEN 2 VERTICAL STUDS WITHIN THE STUD WALL BAY ATTACHED WITH A HORIZONTAL SPREADER HANGER BAR ADJUSTING FROM 16" TO 24" CENTER.

- * BOX IS BACKED WITH CUSTOMERS SPECIFIED LEAD THICKNESS OVERSIZED TO CAPTURE LINEAR RADIATION X-RAYS.
- * LEAD SURFACE IS COATED TO REDUCE ANY POTENTIAL LEAD CONTACT EXPOSURE.
- * SINGLE GANG 2"x4" OR A "4-S" DOUBLE GANG ELECTRICAL 4"x4" BOX KNOCK-OUTS ACCEPT 1/2" & 3/4" CONDUIT.
- * EASILY INSTALLS IN MINUTES. BOX IS NOT INCLUDED.

NTS PATENT PENDING

Terms of Use: Certain designs and concepts are the exclusive proprietary property and work product of Ray-Bar Engineering provided in good faith as a courtesy for the architectural design of projects specifying, incorporating and utilizing genuine Ray-Bar products and assemblies. Ray-Bar designs are not to be copied, altered, plagiarized or utilized in any competitive or detrimental manner against Ray-Bar as protected by law and/or copyrights. "All Rights Reserved"

	JOB NAME:
	LOCATION:
	ROOM NUMBER:
	SHEET OF:
RAY-BAR SHIELDED BACKING / SPREADER BAR	

RAY-BAR ENGINEERING CORP.

Toll Free: 1(800) 444-XRAY / 1(800) 444-9729

Telephone: (626) 969-1818 24 Hour Fax: 1(800) 333-XRAY /

1(800) 333-9729

website: www.raybar.com www.xrayglass.com

RAY-BAR SHIELDED **NEW BOX** PENETRATION **SPREADER** BAR